


Rack Installation

⚠ Caution

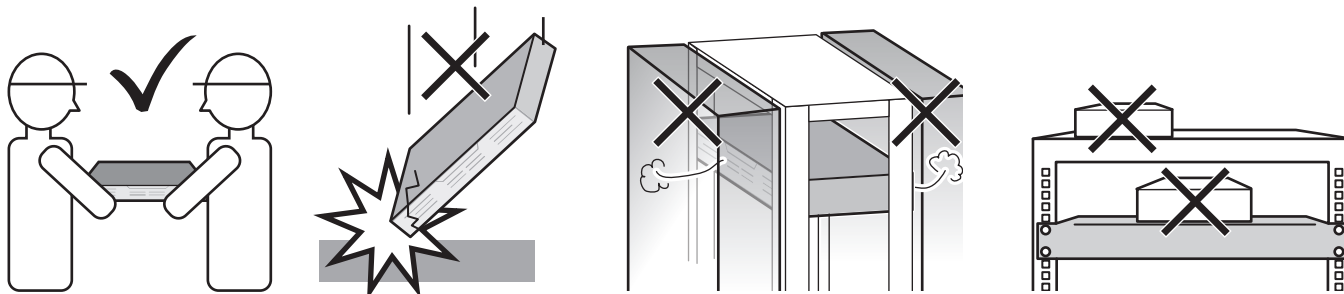



Included Parts


a 4 post rack mounting bracket (inner) 2


b 4 post rack mounting bracket (outer) 2


c 2 post rack mounting bracket 2




d hand screw..... 8 

e M4 screw..... 4 

f M5 screw..... 4 

g inch screw..... 4 

h cage nut..... 4 



Installation

Are the holes in your rack round or square?

A



B




→ Next Page

A




Round Holes (2 post and 4 post)

1 Attach brackets **c** to the TeraStation with screws **e**.

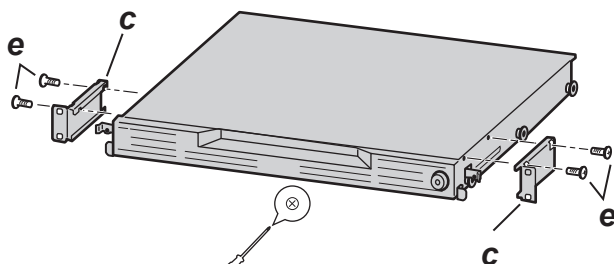

Phillips (crosshead) screwdriver


2 Attach the TeraStation to the rack with screws **f** or **g**.

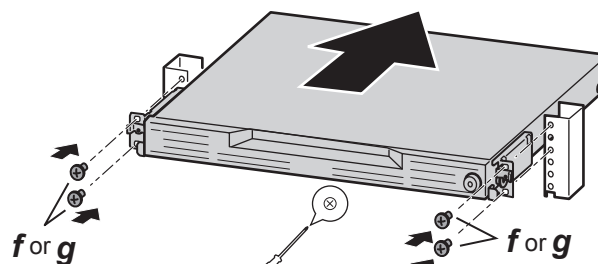


Installation is complete.

**B****Square Holes****4 post rack**


- 1** Attach the outer rack mounting brackets **b** to the back side of the rack and secure them with hand screws **d**.

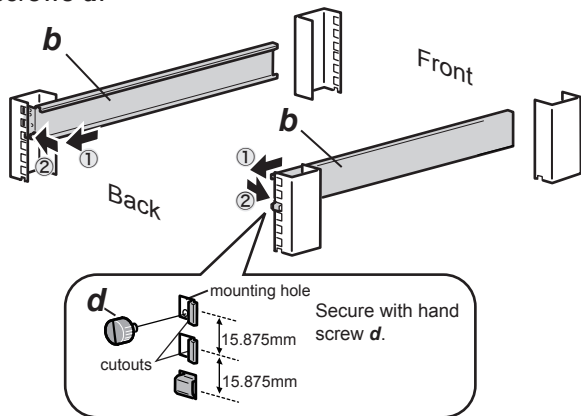

- 2** Slide the inner rack mounting brackets **a** into brackets **b** from the front, then secure them with hand screws **d**.

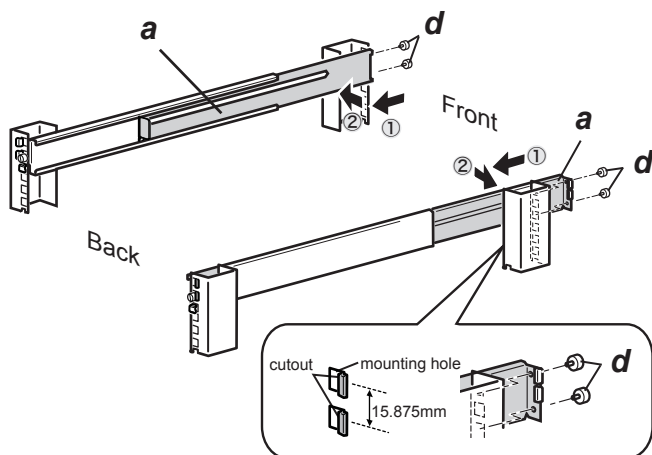

- 3** Slide the TeraStation into the rack until it clicks into place. Secure with hand screws **d**.

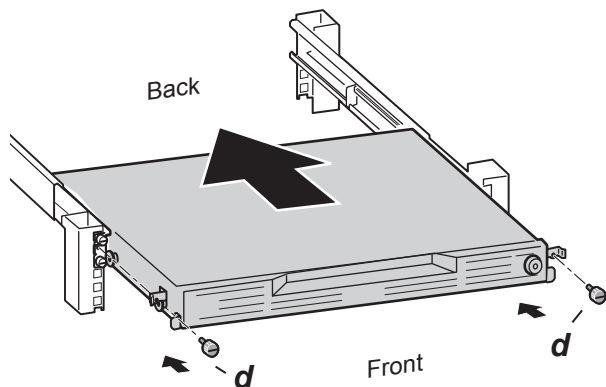


Installation is complete.


**2 post rack**

- 1** Insert 4 cage nuts **h** into mounting holes in the rack.


Hint: Hook one tab of each cage nut, then use a flat-head screwdriver to insert the other tab.



- 2** Attach brackets **c** to the TeraStation with screws **e**.

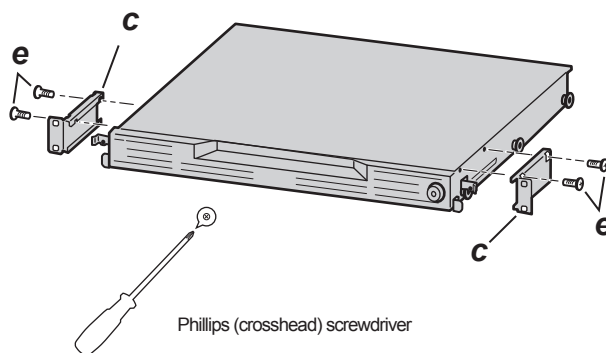

- 3** Attach the TeraStation to the rack with screws **f**.

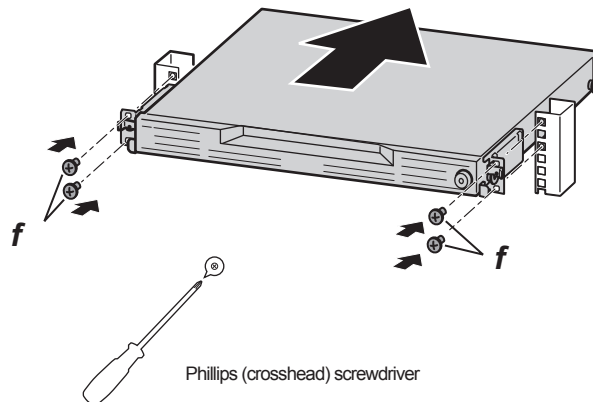

Installation is complete.